

TECHNICAL DATA  
DATA SHEET 329, REV. A  
Formerly part number SHD52621

## FIXED POSITIVE 1.5 AMP 12 VOLT REGULATOR

**FEATURES:**  
**ISOLATED HERMETIC PACKAGE**  
**SIMILAR to INDUSTRY TYPE 7815A**

**MAXIMUM RATINGS**


All ratings are at  $T_C = 25^\circ\text{C}$  unless otherwise specified.

Parameter	Conditions		Maximum	Units
Input Voltage	$V_O = 15\text{V}$	-	35	Vdc
Ambient Operating Temperature Range ( $T_A$ )	-	-	-55 to +150	$^\circ\text{C}$
Storage Temperature Range	-	-	-65 to +150	$^\circ\text{C}$
Thermal Resistance ( $R_{\theta JC}$ )	-	-	4.3	$^\circ\text{C/W}$
Rated Power	$T_C = +25^\circ\text{C}$	-	15	W

**ELECTRICAL CAHRACTERISTICS**

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Units	
$V_O$	Output Voltage	$T_j = 25^\circ\text{C}$	11.88	12	12.12	V	
		$P_D \leq 15\text{W}, 5\text{ mA} \leq I_O \leq 1\text{A}$ $14.5\text{V} \leq V_{IN} \leq 27\text{V}$	11.64		12.36	V	
$V_{RLINE}$	Line Regulation	$14.5\text{V} \leq V_{IN} \leq 27\text{V}$	$T_A = 25^\circ\text{C}$		18	mV	
			$-55^\circ\text{C} \leq T_C \leq +125^\circ\text{C}$		50	mV	
		$16\text{V} \leq V_{IN} \leq 22\text{V}$	$T_C = 25^\circ\text{C}$		9	mV	
			$-55^\circ\text{C} \leq T_C \leq +125^\circ\text{C}$		30	mV	
$V_{RLOAD}$	Load Regulation	$T_j = 25^\circ\text{C}$	$5\text{ mA} \leq I_O \leq 1.5\text{A}$		32	mV	
			$250\text{ mA} \leq I_O \leq 750\text{mA}$		20	mV	
		$5\text{ mA} \leq I_O \leq 0.5\text{A}, -55^\circ \leq T_C \leq +125^\circ\text{C}$				60	mV
$I_Q$	Quiescent Current	$T_C = 25^\circ\text{C}$			6	mA	
		$-55^\circ\text{C} \leq T_C \leq +125^\circ\text{C}$			6.5	mA	
$\Delta I_Q$	Quiescent Current Change	$5\text{ mA} \leq I_O \leq 1.0\text{A}, -55^\circ\text{C} \leq T_C \leq +125^\circ\text{C}$			0.5	mA	
		$15\text{V} \leq V_{IN} \leq 30\text{V}, -55^\circ\text{C} \leq T_C \leq +125^\circ\text{C}$			0.8	mA	
$V_{DO}$	Dropout Voltage	$T_C = 25^\circ\text{C}, I_O = 1.0\text{A}$			2.5	V	
$I_{O(pk)}$	Peak Output Current	$T_C = 25^\circ\text{C}$		1.5	3.3	A	
$I_{OS}$	Short Circuit Current	$V_{IN} = 35\text{V}$	$T_C = 25^\circ\text{C}$		1.2	A	
			$-55^\circ\text{C} \leq T_C \leq +125^\circ\text{C}$		2.8		
$\frac{\Delta V_{IN}}{\Delta V_{OUT}}$	Ripple Rejection	$f = 120\text{Hz}$ $\Delta V_{IN} = 10\text{V}$	$I_O \leq 1\text{A}, T_C = 25^\circ\text{C}$		61	70	dB
			$I_O \leq 500\text{ mA}, -55^\circ\text{C} \leq T_C \leq +125^\circ\text{C}$		54		dB
$N_O$	Output Noise Voltage	$T_C = 25^\circ\text{C}, f = 10\text{Hz to } 100\text{kHz}$		-	40	$\mu\text{V/V rms}$	
$\frac{\Delta V_{OUT}}{\Delta t}$	Long Term Stability	$T_C = 25^\circ\text{C}, t = 1000\text{ hours}$		-	75	mV	

**MECHANICAL DIMENSIONS**

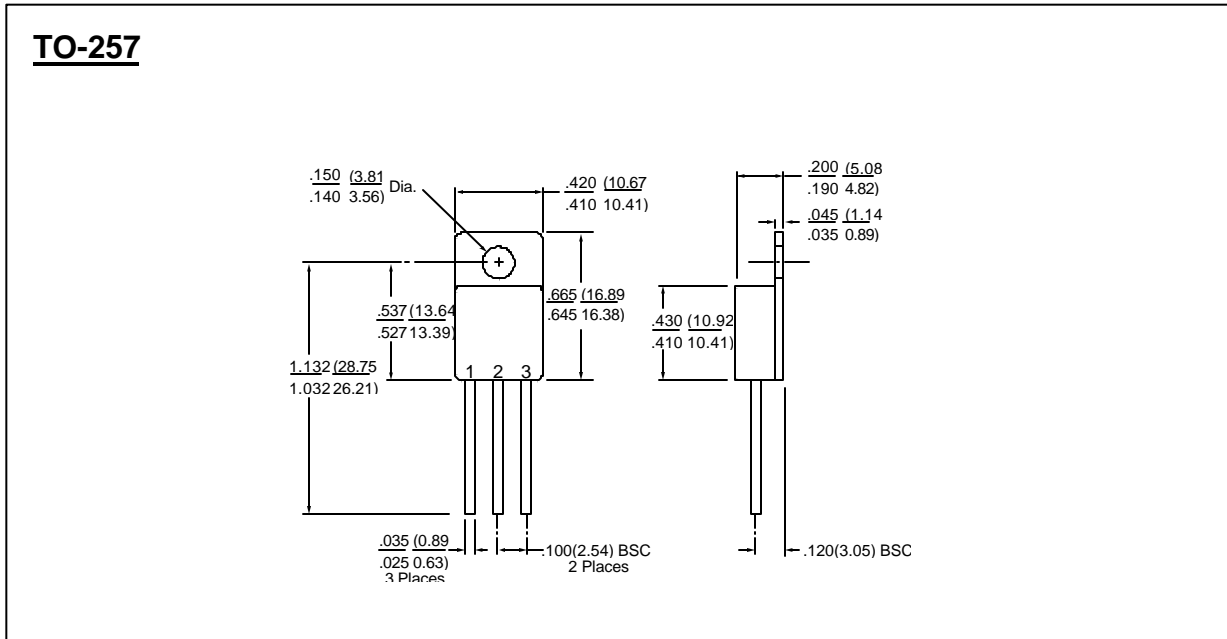

**PINOUT TABLE**

TYPE	PIN 1	PIN 2	PIN 3
TO - 257, +12V Regulator	V <sub>IN</sub>	GROUND	V <sub>OUT</sub>

**TECHNICAL DATA**

**DISCLAIMER:**

- 1- The information given herein, including the specifications and dimensions, is subject to change without prior notice to improve product characteristics. Before ordering, purchasers are advised to contact the Sensitron Semiconductor sales department for the latest version of the datasheet(s).
- 2- In cases where extremely high reliability is required (such as use in nuclear power control, aerospace and aviation, traffic equipment, medical equipment, and safety equipment), safety should be ensured by using semiconductor devices that feature assured safety or by means of users' fail-safe precautions or other arrangement.
- 3- In no event shall Sensitron Semiconductor be liable for any damages that may result from an accident or any other cause during operation of the user's units according to the datasheet(s). Sensitron Semiconductor assumes no responsibility for any intellectual property claims or any other problems that may result from applications of information, products or circuits described in the datasheets.
- 4- In no event shall Sensitron Semiconductor be liable for any failure in a semiconductor device or any secondary damage resulting from use at a value exceeding the absolute maximum rating.
- 5- No license is granted by the datasheet(s) under any patents or other rights of any third party or Sensitron Semiconductor.
- 6- The datasheet(s) may not be reproduced or duplicated, in any form, in whole or part, without the expressed written permission of Sensitron Semiconductor.
- 7- The products (technologies) described in the datasheet(s) are not to be provided to any party whose purpose in their application will hinder maintenance of international peace and safety nor are they to be applied to that purpose by their direct purchasers or any third party. When exporting these products (technologies), the necessary procedures are to be taken in accordance with related laws and regulations.