


TECHNICAL DATA
DATA SHEET 4159, REV. -

NON-HERMETIC POWER FACTOR CORRECTION MODULE

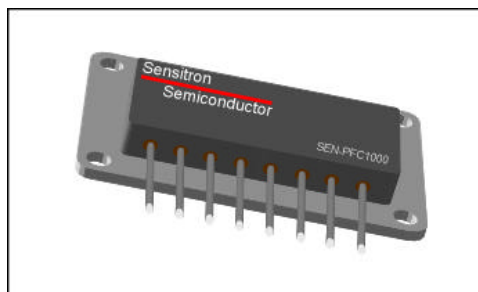

Power Factor Correction Semiconductor Module

FEATURES:

- SEALED PACKAGE
- 600 VOLT, 0.21 OHM, 26.0A MOSFET
- ULTRAFAST DIODE
- RECTIFIER BRIDGE
- 1500/3000 WATT PFC
- HEAT SINK MOUNTING

MOSFET RATINGS

MAXIMUM RATINGS

ALL RATINGS ARE AT $T_C = 25^{\circ}\text{C}$ UNLESS OTHERWISE SPECIFIED.

RATING	SYMBOL	MIN.	TYP.	MAX.	UNITS
GATE TO SOURCE VOLTAGE	V_{GS}	-	-	± 30	Volts
ON-STATE DRAIN CURRENT @ $T_C = 25^{\circ}\text{C}$	I_D	-	-	26	Amps
ON-STATE DRAIN CURRENT @ $T_C = 100^{\circ}\text{C}$	I_D	-	-	17	Amps
OPERATING AND STORAGE TEMPERATURE	T_{OP}/T_{STG}	-55	-	+150	$^{\circ}\text{C}$
TOTAL DEVICE DISSIPATION @ $T_C = 25^{\circ}\text{C}$	P_D	-	-	470	Watts

ELECTRICAL CHARACTERISTICS

CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNITS
DRAIN TO SOURCE BREAKDOWN VOLTAGE $V_{GS} = 0\text{V}, I_D = 1.0\text{mA}$	BV_{DSS}	600	-	-	Volts
STATIC DRAIN TO SOURCE ON STATE RESISTANCE $V_{GS} = 10\text{V}, I_D = 16\text{A}$	$R_{DS(ON)}$	-	-	0.25	Ω
GATE THRESHOLD VOLTAGE $V_{DS} = V_{GS}, I_D = 250\mu\text{A}$	$V_{GS(th)}$	3.0	-	5.0	Volts
FORWARD TRANSCONDUCTANCE $V_{DS} = 50\text{V}, I_{DS} = 16.0\text{A}$	g_{fs}	13	-	-	$S(1/\Omega)$
ZERO GATE VOLTAGE DRAIN CURRENT $V_{DS} = 600\text{V}, V_{GS} = 0\text{V}$ $V_{DS} = 480\text{V}, V_{GS} = 0\text{V}, T_J = 125^{\circ}\text{C}$	I_{DSS}	-	-	50 2000	μA
GATE TO SOURCE LEAKAGE FORWARD $V_{GS} = 30\text{V}$ GATE TO SOURCE LEAKAGE REVERSE $V_{GS} = -30\text{V}$	I_{GSS}	-	-	100 -100	nA
TURN ON DELAY TIME $V_{DD} = 300\text{V}, I_D = 26\text{A}, R_G = 4.3\Omega$ RISE TIME TURN OFF DELAY TIME FALL TIME	$t_{d(ON)}$ t_r $t_{d(OFF)}$ t_f	-	-	31 110 47 42	nsec
TOTAL GATE CHARGE $I_D = 26\text{A},$	Q_g	-	-	180	nC

SENSITRON

TECHNICAL DATA

DATA SHEET 4159, REV. -

ELECTRICAL CHARACTERISTICS – MOSFET RATINGS – Cont.

CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNITS
GATE TO SOURCE CHARGE $V_{GS} = 10V$	Q_{gs}	-	-	61	nC
GATE TO DRAIN CHARGE $V_{DS} = 480V$	Q_{gd}	-	-	85	nC
DIODE FORWARD VOLTAGE $T_C = 25^\circ C, I_S = 26A, V_{GS} = 0V$	V_{SD}	-	-	1.5	Volts
REVERSE RECOVERY CHARGE $T_J = 25^\circ C, di/dt \leq 100A/\mu sec, V_{DD} \leq 50V$	Q_{RR}	-	-	10	μC
REVERSE RECOVERY TIME $T_J = 25^\circ C, I_F = 26A, Di/dt \leq 100A/\mu sec$	t_{rr}	-	-	250	nsec
THERMAL RESISTANCE	R_{thjc}		.25		$^\circ C/W$
INPUT CAPACITANCE $V_{GS} = 0V$	C_{iss}	-	5020	-	pF
OUTPUT CAPACITANCE $V_{DS} = 25V$	C_{oss}		450		
REVERSE TRANSFER CAPACITANCE $f = 1.0MHz$	C_{rss}		34		

DIODE BRIDGE RATINGS**MAX. RATINGS/ELECTRICAL CHARACTERISTICS**All ratings are at $T_A = 25^\circ C$ unless otherwise specified.

RATING	CONDITIONS	MIN	TYP	MAX	UNIT
Peak Inverse Voltage (PIV)	-	-	-	800	Vdc
Average DC Output Current (I_o) ($T_C = \text{Case Temp}$)	$T_C = 100^\circ C$	-	-	50	Amps
Peak Single Cycle Surge Current (I_{FSM})	$t_p = 8.3 \text{ ms}$ Single Half Cycle Sine Wave, Superimposed On Rated Load	-	-	500	Amps(pk)
Maximum Forward Voltage Per Leg (V_f)	$I_f = 50A_{dc}$ (300 μsec pulse, duty cycle < 2%)	-	-	1.2	Volts
THERMAL RESISTANCE				1.5	$^\circ C/W$
Maximum Instantaneous Reverse Current At Rated (PIV)	$T_A = 25^\circ C$ $T_A = 100^\circ C$	-	-	5.0 300	$\mu Amps$

SENSITRON

TECHNICAL DATA

DATA SHEET 4159, REV. –

ULTRAFAST RECTIFIER RATINGS**MAXIMUM RATINGS**All ratings are @ $T_A = 25\text{ }^{\circ}\text{C}$ unless otherwise specified

RATING	SYMBOL	MAX	UNIT
PEAK INVERSE VOLTAGE PER LEG	PIV	800	Volts
MAX DC OUTPUT CURRENT ($T_C=100\text{ }^{\circ}\text{C}$) COMMON CATHODE / ANODE	I_O	25	Amps
MAXIMUM SURGE CURRENT ($T_C=25\text{ }^{\circ}\text{C}$, $T=8.3\text{ MSEC}$) PER LEG	I_{FSM}	100	Amps
REVERSE RECOVERY TIME ($I_f = 25\text{A}$, $di/dt = 100\text{A}/\mu\text{sec}$, $V_R = 30\text{V}$, $T_C=25\text{ }^{\circ}\text{C}$)		50	nsec
THERMAL RESISTANCE		1.5	$^{\circ}\text{C}/\text{W}$
MAXIMUM OPERATING AND STORAGE TEMPERATURE RANGE	Top/Tstg	-55 to + 150	$^{\circ}\text{C}$

ELECTRICAL CHARACTERISTICS

CHARACTERISTIC	SYMBOL	MAX	UNITS
MAXIMUM FORWARD VOLTAGE DROP, Pulsed, PER LEG $T_C = 25\text{ }^{\circ}\text{C}$ ($I_f = 25\text{ Amps}$)	V_f	2.60	Volts
MAXIMUM FORWARD VOLTAGE DROP, Pulsed, PER LEG $T_C = 100\text{ }^{\circ}\text{C}$ ($I_f = 25\text{ Amps}$)	V_f	2.45	Volts
MAXIMUM REVERSE CURRENT PER LEG $T_C = 25\text{ }^{\circ}\text{C}$ I_r @ 800V PIV	I_r	200	μA
MAXIMUM REVERSE CURRENT PER LEG $T_C = 100\text{ }^{\circ}\text{C}$ I_r @ 800V PIV	I_r	2	mA

MODULE RATINGS

MAXIMUM OPERATING AND STORAGE TEMPERATURE RANGE	Top/Tstg	-55 to + 150	$^{\circ}\text{C}$
AVERAGE THERMAL RESISTANCE	$R_{\theta jc}$	1.1	$^{\circ}\text{C}/\text{W}$


SENSITRON

TECHNICAL DATA


DATA SHEET 4159, REV. -

MECHANICAL DIMENSIONS: in Inches

PIN NUMBER	DEVICE	FUNCTION
1	BRIDGE RECTIFIER	AC INPUT
2	BRIDGE RECTIFIER	AC INPUT
3	BRIDGE RECTIFIER	+ DC OUTPUT
4	MOSFET	DRAIN
5	ULTRAFAST RECTIFIER	ANODE
6	ULTRAFAST RECTIFIER	CATHODE
7	MOSFET	GATE
8 (DUAL USE)	MOSFET	SOURCE
	BRIDGE RECTIFIER	- DC OUTPUT

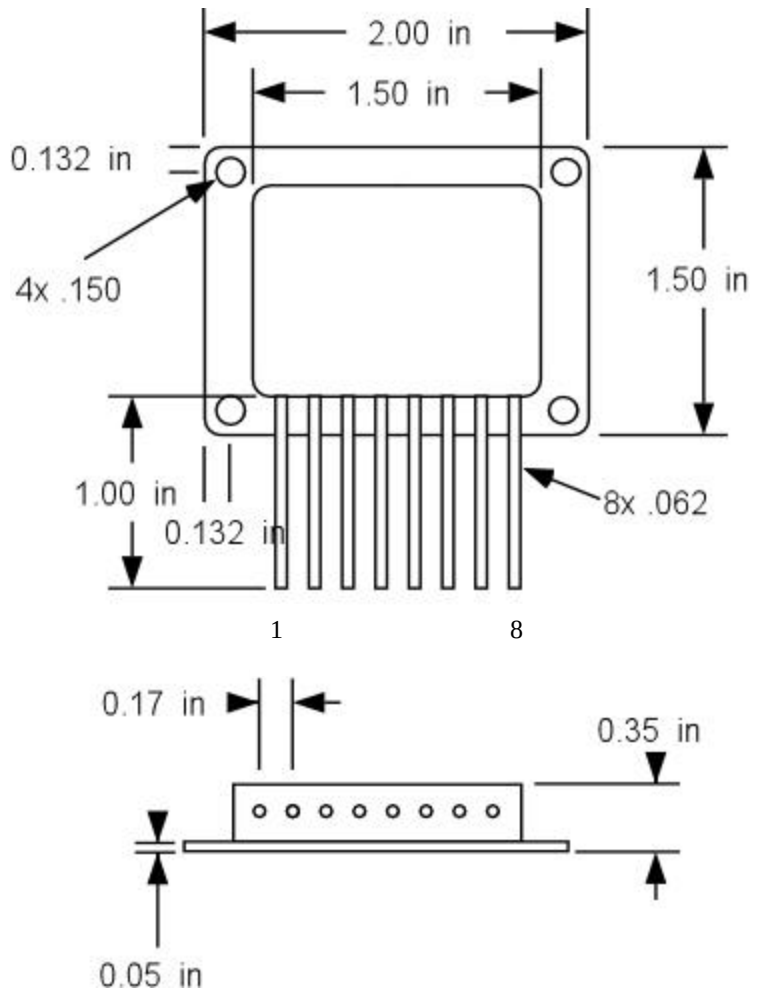

SCHEMATIC DIAGRAM

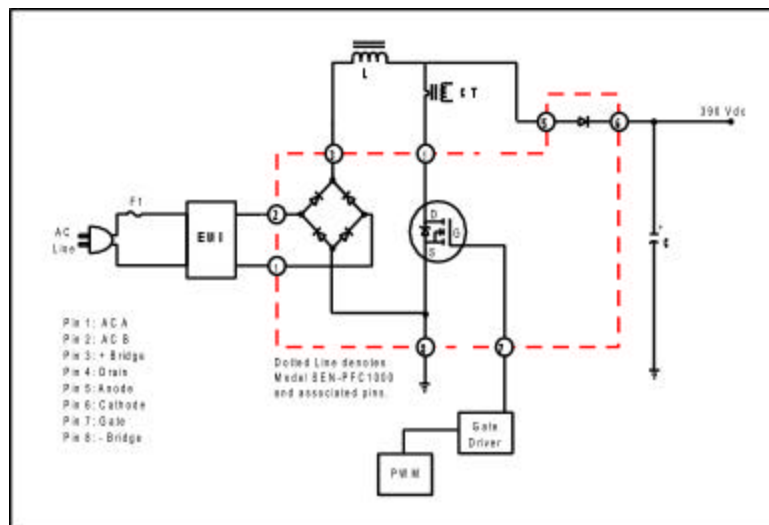

TECHNICAL DATA

DISCLAIMER:

- 1- The information given herein, including the specifications and dimensions, is subject to change without prior notice to improve product characteristics. Before ordering, purchasers are advised to contact the Sensitron Semiconductor sales department for the latest version of the datasheet(s).
- 2- In cases where extremely high reliability is required (such as use in nuclear power control, aerospace and aviation, traffic equipment, medical equipment, and safety equipment), safety should be ensured by using semiconductor devices that feature assured safety or by means of users' fail-safe precautions or other arrangement.
- 3- In no event shall Sensitron Semiconductor be liable for any damages that may result from an accident or any other cause during operation of the user's units according to the datasheet(s). Sensitron Semiconductor assumes no responsibility for any intellectual property claims or any other problems that may result from applications of information, products or circuits described in the datasheets.
- 4- In no event shall Sensitron Semiconductor be liable for any failure in a semiconductor device or any secondary damage resulting from use at a value exceeding the absolute maximum rating.
- 5- No license is granted by the datasheet(s) under any patents or other rights of any third party or Sensitron Semiconductor.
- 6- The datasheet(s) may not be reproduced or duplicated, in any form, in whole or part, without the expressed written permission of Sensitron Semiconductor.
- 7- The products (technologies) described in the datasheet(s) are not to be provided to any party whose purpose in their application will hinder maintenance of international peace and safety nor are they to be applied to that purpose by their direct purchasers or any third party. When exporting these products (technologies), the necessary procedures are to be taken in accordance with related laws and regulations.