


PRELIMINARY TECHNICAL DATA
DATA SHEET 4173, REV. A

10 KW, 3 Phase Module For Active Power Factor Correction

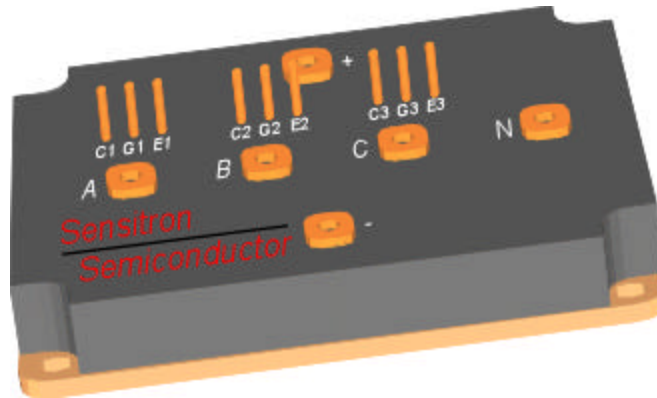

- 3 Phase Single Package
- IGBT Switching, 600V, 40A, $V_{CE(on)} = 2.1V$
- FRED Diodes, 600V, 25A, $t_{rr} = 23ns$, $Q_{rr} = 112nC$
- High Current Terminals
- Low profile
- Latest Generation IGBT Technology

- -55 to +150°C
- Access to all IGBT Leads
- Easy Heat Sink Mounting
- Cost Effective
- Large Surface Area
- Low Inductance

ELECTRICAL CHARACTERISTICS

($T_j = 25^\circ C$ UNLESS OTHERWISE SPECIFIED)

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT
IGBT SPECIFICATIONS					
Collector to Emitter Breakdown Voltage $I_C = 250 \mu A$, $V_{GE} = 0V$	BV_{CES}	600	-	-	V
Continuous Collector Current $T_C = 25^\circ C$ $T_C = 100^\circ C$	I_C	-	-	40 20	A
Pulsed Collector Current, 1mS	I_{CM}	-	-	160	A
Gate to Emitter Voltage	V_{GE}	-	-	+/-20	V
Gate-Emitter Leakage Current, $V_{GE} = +/-20V$	I_{GES}	-	-	+/- 100	nA
Gate Threshold Voltage, $I_C = 2mA$	$V_{GE(TH)}$	3.0	-	6.0	V

SENSITRON

PRELIMINARY TECHNICAL DATA

DATA SHEET 4173, REV. A

ELECTRICAL CHARACTERISTICS (continued)

(T_j=25°C UNLESS OTHERWISE SPECIFIED)

Zero Gate Voltage Collector Current V _{CE} = 600 V, V _{GE} =0V T _j =25°C V _{CE} = 600 V, V _{GE} =0V T _j =150°C	I _{CES}	- -	- -	0.25 2.5	Ma mA
Collector to Emitter Saturation Voltage, I _C = 20A, V _{GE} = 15V, T _C = 25 °C I _C = 40A, V _{GE} = 15V, T _C = 25 °C I _C = 20A, V _{GE} = 15V, T _C = 150 °C	V _{CE(SAT)}	- -	2.05 2.36 1.9	2.5 - -	V
Input Capacitance Output Capacitance Reverse Transfer Cap. V _{CE} = 30V, V _{GE} = 0 V, f = 1 MHz	C _{ies} C _{oes} C _{res}	-	1900 140 35	-	pF
Turn On Delay Time Rise Time Turn Off Delay Time Fall Time Total Energy Loss (T _j = 150 °C, I _C = 20A, V _{GE} = 15V, inductive load, V _{CC} = 480V, R _G = 10Ω	t _{d(on)} t _r t _{d(off)} t _f E _{ts}	- - - -	25 23 170 124 .85	- - - -	nsec mJ
Maximum Thermal Resistance	R _{θJC}	-	-	1.77	°C/W

FRED MAXIMUM RATINGS

All ratings are @ T_A = 25 °c unless otherwise specified

RATING	SYMBOL	MAX.	UNITS
CATHODE-TO-ANODE VOLTAGE	V _r	600	Volts
CONTINUOUS FORWARD CURRENT (T _C =100°C)	I _F	25	Amps
SINGLE PULSE FORWARD CURRENT	I _{FSM}	225	Amps
MAXIMUM REPETITIVE FORWARD CURRENT	I _{FRM}	100	Amps
REVERSE RECOVERY TIME (I _F = 1A, dI/dt = 200A/μsec, V _R = 30V, T _j =25 °C)	t _{rr} (typ)	23	nsec
(I _F = 25A, dI/dt = 200A/μsec, V _R = 200V, T _j =25 °C)	t _{rr} (max)	75	nsec
(I _F = 25A, dI/dt = 200A/μsec, V _R = 200V, T _j =125 °C)	t _{rr} (max)	160	nsec
MAXIMUM REVERSE RECOVERY CURRENT (V _R = 200V, I _F = 25A, dI/dt = 200A / usec, T _j =25 °C) (V _R = 200V, I _F = 25A, dI/dt = 200A / usec, T _j =125 °C)	I _{RM} (typ) I _{RM} (max)	4.5 15	Amps

PRELIMINARY TECHNICAL DATA

DATA SHEET 4173, REV. A

FRED MAXIMUM RATINGS (continued)

All ratings are @ $T_A = 25^\circ\text{C}$ unless otherwise specified

Reverse Recovery Charge ($V_R = 200\text{V}$, $I_F = 25\text{A}$, $dI/dt = 200\text{A} / \mu\text{sec}$, $T_J = 25^\circ\text{C}$) ($V_R = 200\text{V}$, $I_F = 25\text{A}$, $dI/dt = 200\text{A} / \mu\text{sec}$, $T_J = 125^\circ\text{C}$)	Qrr1 Qrr2	112 1200	nC
MAXIMUM THERMAL RESISTANCE	$R_{\theta JC}$	2.0	$^\circ\text{C/W}$
MAXIMUM OPERATING AND STORAGE TEMPERATURE RANGE	Top/Tstg	-55 to +150	$^\circ\text{C}$


FRED ELECTRICAL CHARACTERISTICS

CHARACTERISTIC	SYMBOL	MAX.	UNITS
MAXIMUM FORWARD VOLTAGE DROP, $T_C = 25^\circ\text{C}$ ($I_f = 25\text{Amps}$) $T_C = 25^\circ\text{C}$ ($I_f = 50\text{Amps}$) $T_C = 125^\circ\text{C}$ ($I_f = 25\text{Amps}$)	V_{FM}	1.7 2.0 1.7	Volts
MAXIMUM REVERSE CURRENT PER LEG $T_C = 25^\circ\text{C}$ I_r @ 600V PIV $T_C = 125^\circ\text{C}$ I_r @ 480V PIV	I_{RM}	20 2000	μA
LEAD INDUCTANCE	L_L	TBD	nH
JUNCTION CAPACITANCE	C_T	100	pF

Pin Number	Pin Description
A	AC IN, Phase A
B	AC IN, Phase B
C	AC IN, Phase C
N	DC Common
C1	Collector IGBT1/+Bridge 1
G1	Gate IGBT1
E1	Emitter IGBT1/-Bridge 1
C2	Collector IGBT2/+Bridge 2
G2	Gate IGBT2
E2	Emitter IGBT2/-Bridge 2
C3	Collector IGBT3/+Bridge 3
G3	Gate IGBT3
E3	Emitter IGBT3/-Bridge 3

PRELIMINARY TECHNICAL DATA
DATA SHEET 4173, REV. A

Mechanical Dimensions: In Inches

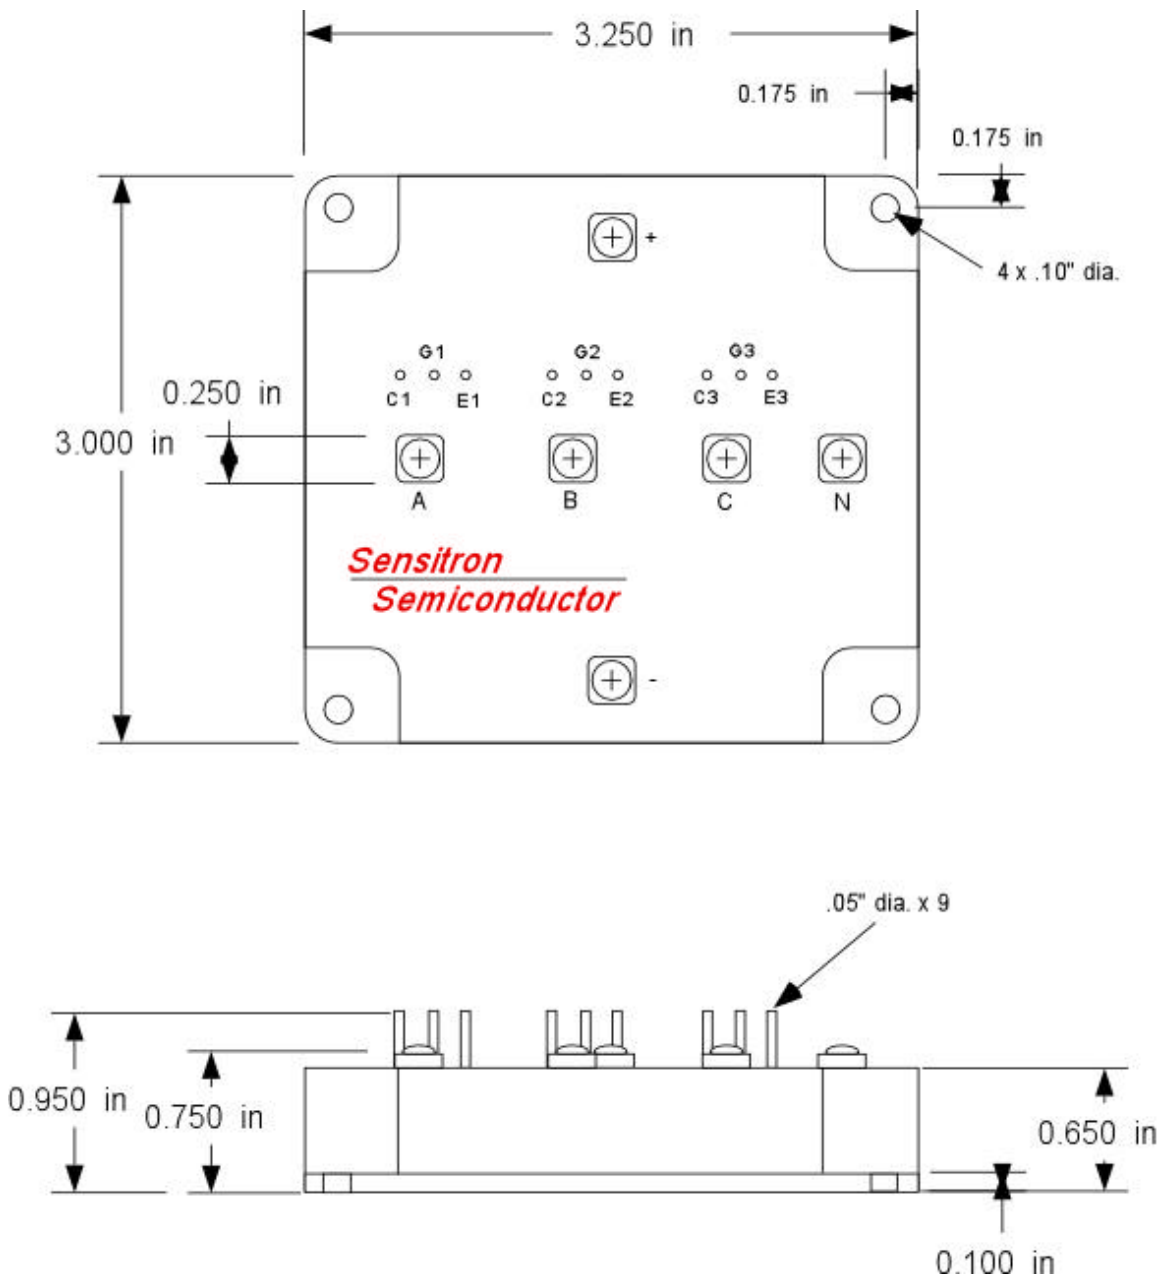

TECHNICAL DATA

DISCLAIMER:

- 1- The information given herein, including the specifications and dimensions, is subject to change without prior notice to improve product characteristics. Before ordering, purchasers are advised to contact the Sensitron Semiconductor sales department for the latest version of the datasheet(s).
- 2- In cases where extremely high reliability is required (such as use in nuclear power control, aerospace and aviation, traffic equipment, medical equipment, and safety equipment), safety should be ensured by using semiconductor devices that feature assured safety or by means of users' fail-safe precautions or other arrangement.
- 3- In no event shall Sensitron Semiconductor be liable for any damages that may result from an accident or any other cause during operation of the user's units according to the datasheet(s). Sensitron Semiconductor assumes no responsibility for any intellectual property claims or any other problems that may result from applications of information, products or circuits described in the datasheets.
- 4- In no event shall Sensitron Semiconductor be liable for any failure in a semiconductor device or any secondary damage resulting from use at a value exceeding the absolute maximum rating.
- 5- No license is granted by the datasheet(s) under any patents or other rights of any third party or Sensitron Semiconductor.
- 6- The datasheet(s) may not be reproduced or duplicated, in any form, in whole or part, without the expressed written permission of Sensitron Semiconductor.
- 7- The products (technologies) described in the datasheet(s) are not to be provided to any party whose purpose in their application will hinder maintenance of international peace and safety nor are they to be applied to that purpose by their direct purchasers or any third party. When exporting these products (technologies), the necessary procedures are to be taken in accordance with related laws and regulations.