

TECHNICAL DATA
DATA SHEET 926, REV B**THREE PHASE FULL WAVE
BRIDGE RECTIFIER ASSEMBLY****DESCRIPTION: A 600 VOLT, 18.5 AMP, 5 MICROSECOND THREE PHASE BRIDGE RECTIFIER ASSEMBLY.****MAXIMUM RATINGS**All ratings are at $T_A = 25^{\circ}\text{C}$ unless otherwise specified.

RATING	CONDITIONS	MIN	TYP	MAX	UNIT
Peak Inverse Voltage (PIV)	-	-	-	600	Vdc
Average DC Output Current ($T_C = \text{Case Temp}$) (I_o)	$T_C = 55^{\circ}\text{C}$ $T_C = 100^{\circ}\text{C}$ $T_C = 125^{\circ}\text{C}$	-	-	18.5 12.0 9.5	Amps
Average DC Output Current Ambient Temp. (no heat sink) (I_o)	$T_A = 25^{\circ}\text{C}$ $T_A = 55^{\circ}\text{C}$ $T_A = 100^{\circ}\text{C}$	-	-	6.0 5.0 3.0	Amps
Peak Single Cycle Surge Current (I_{FSM})	$t_p = 8.3 \text{ ms}$ Single Half Cycle Sine Wave, Superimposed On Rated Load	-	-	100	Amps(pk)
Peak Recurrent Forward Surge Current (I_{FRM})	-	-	-	40	Amps(pk)
Thermal Resistance (θ_{JL})	-	-	-	2.5	$^{\circ}\text{C/W}$
Operating and Storage Temp. (T_{op} & T_{stg})	-	-55	-	+150	$^{\circ}\text{C}$

ELECTRICAL CHARACTERISTICS

CHARACTERISTICS	CONDITIONS	MIN	TYP	MAX	UNIT
Maximum Forward Voltage (V_f)	$I_f = 3\text{A}$ (300 μsec pulse, duty cycle < 2%)	-	-	1.0	Volts
Maximum Instantaneous Reverse Current At Rated (PIV) (I_r)	$T_A = 25^{\circ}\text{C}$ $T_A = 100^{\circ}\text{C}$	-	-	5.0 100	μAmps
Reverse Recovery Time (t_{rr})	$I_f = 0.5\text{A}$, $I_r = 1.0\text{A}$, $I_{rr} =$ 0.25A	-	-	5.0	μsec

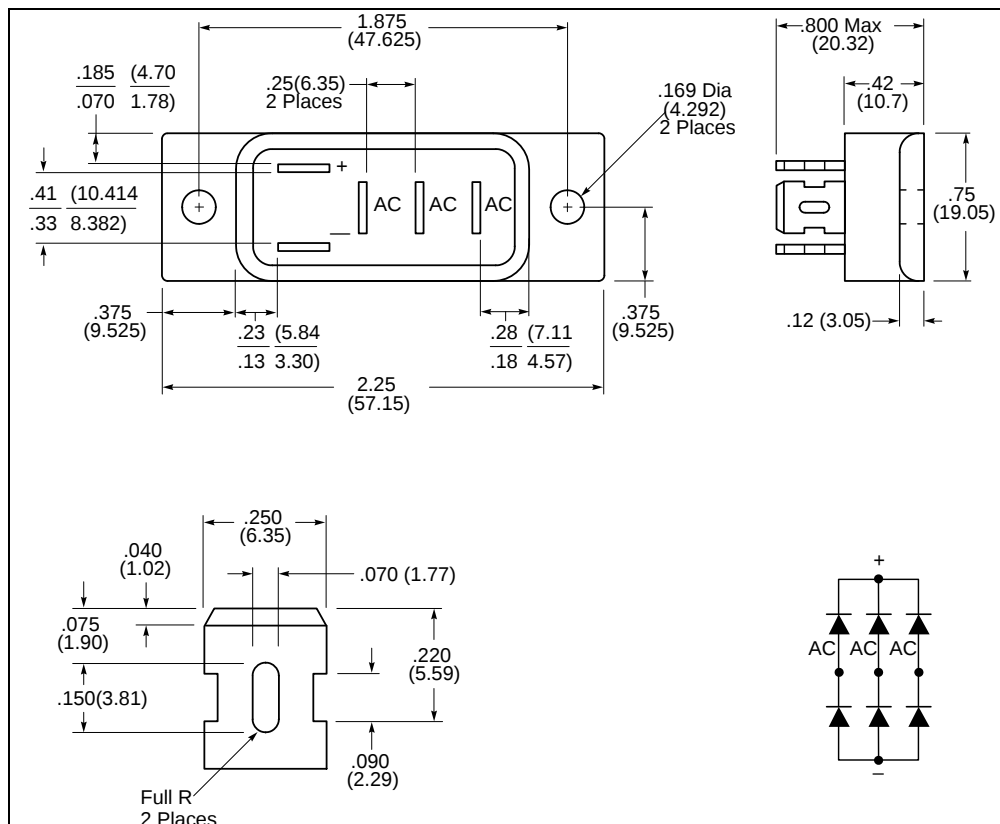


FIG. 404

Note: Case finish - Black Anodized

7- The products (technologies) described in the datasheet(s) are not to be provided to any party whose purpose in their application will hinder maintenance of international peace and safety nor are they to be applied to that purpose by their direct purchasers or any third party. When exporting these products (technologies), the necessary procedures are to be taken in accordance with related laws and regulations.